

CBL00100

Communications Cable, Vlinx Fieldbus Gateway to Allen Bradley® SLC500 via DF1

PRODUCT INFORMATION

Vlinx Fieldbus Gateway Communications Cable

Allen Bradley®

SLC500


Connections			
From VFG	Signal Name	RJ-12	DB9 Female
1	CTS	1	---
2	Rx	2	3
3	COMM	3	5
4	COMM	4	---
5	Tx	5	2
6	RTS	6	---
---	---	---	1,6,7,8

Note: This table denotes the pin name at the RS-232 Port. When connecting, the pin name at the RS-232 port is connected to the opposite of that pin name at the destination device


Note: Refer to Manual for PLC Accessible Data

Allen Bradley is a registered trademark of Rockwell Automation

CBL00100

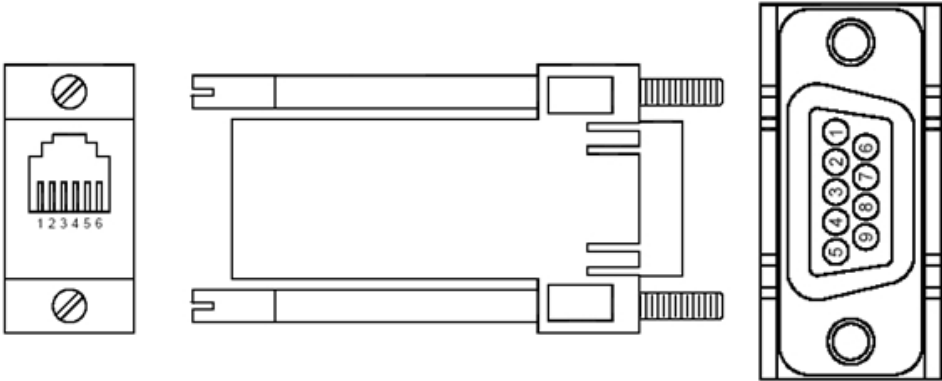

Length = 10 ft (3.05 m)



RS-232 Port from VFG

B&B ELECTRONICS