

CBL00101

Communications Cable, Vlinx Fieldbus Gateway to Allen Bradley® PLC 5 via CH 0

Vlinx Fieldbus Gateway Communications Cable

Allen Bradley®



PLC5 CH0

Connections			
From VFG	Signal Name	RJ-12	DB25 Male
1	CTS	1	---
2	Rx	2	2
3	COMM	3	7
4	COMM	4	---
5	Tx	5	3
6	RTS	6	5, 6, 8


Note: This table denotes the pin name at the RS-232 Port. When connecting, the pin name at the RS-232 port is connected to the opposite of that pin name at the destination device

Allen Bradley is a registered trademark of Rockwell Automation

CBL00101

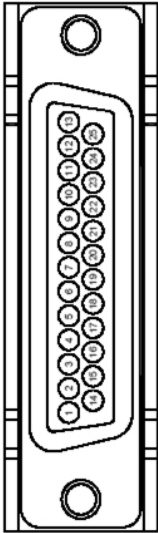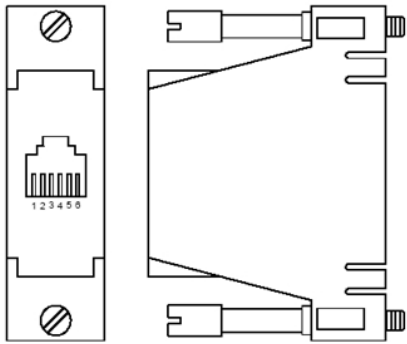

Length = 10 ft (3.05 m)



RS-232 Port from VFG

PRODUCT INFORMATION

B&B ELECTRONICS