


| REV. | REVISION | DATE |
|------|----------|------|
| | | |

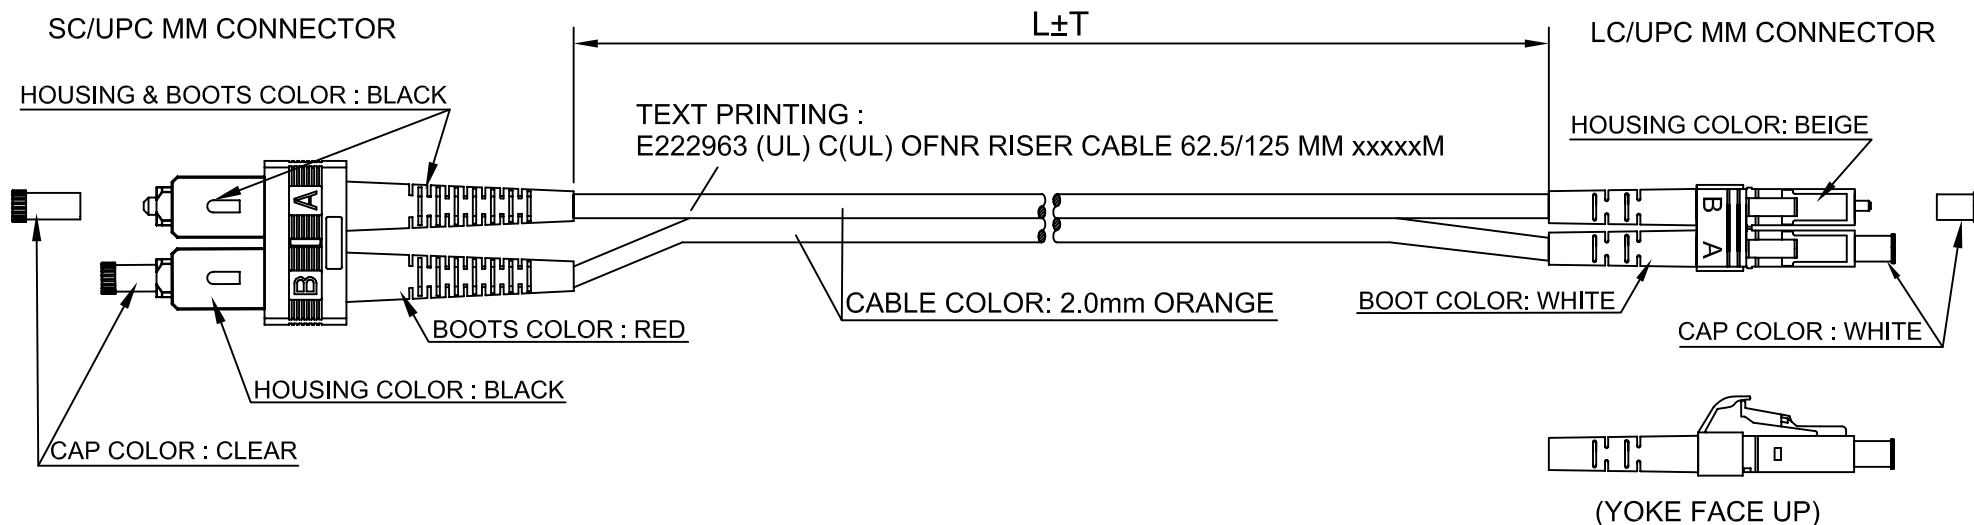

DFMM-SCLC-XX
 xxM SC/LC MM 62.5/125, DUPLEX RISER
 QTY. 1
www.bb-elec.com

DETAIL A


NOTES:

1. INSERTION LOSS < 0.5dB.
2. OPERATION TEMP: -20°C TO +60°C
3. ORANGE PVC OUTER JACKET
4. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

| Part No. | XX | L | T | Barcode |
|---------------|----|--------------|----------------|---------|
| DFMM-SCLC-10M | 10 | 32.8'(10000) | +2"/-0(+50/-0) | |
| DFMM-SCLC-5M | 5 | 16.4'(5000) | +2"/-0(+50/-0) | |
| DFMM-SCLC-3M | 3 | 9.84'(3000) | +2"/-0(+50/-0) | |
| DFMM-SCLC-2M | 2 | 6.56'(2000) | +2"/-0(+50/-0) | |
| DFMM-SCLC-1M | 1 | 3.28'(1000) | +2"/-0(+50/-0) | |

B&B Electronics Manufacturing Co.

| | | | |
|---|-----------------------|--|-----------|
|  | UNIT: Inches[mm] | TITLE: xxM DUPLEX 62.5/125 MULTIMODE LC/SC RISER JUMPER CABLE WITH CLIPS | |
| | DRAWN BY A. MEDINA | DATE 09/18/2008 | |
| CHECKED BY | DATE | DRAWING NO. C.D. 2384 | REV. A |
| APPROVED BY | DATE | REF: | |
| P.O. NO.: | DATE | PART NO. DFMM-SCLC-XX | |