


REV.	REVISION	DATE

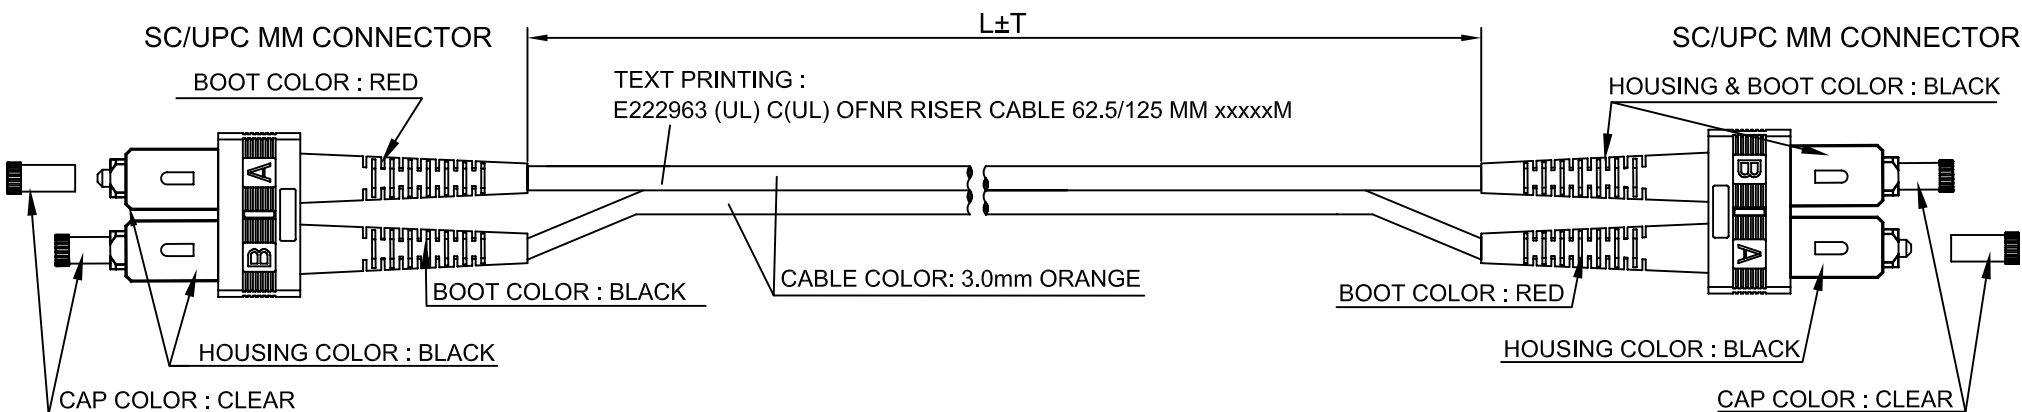

DFMM-SCSC-XX
 xxM SC/SC MM 62.5/125, DUPLEX RISER
 QTY. 1
www.bb-elec.com

DETAIL A


NOTES:

1. INSERTION LOSS < 0.5dB.
2. OPERATION TEMP: -20°C TO +60°C
3. ORANGE PVC OUTER JACKET
4. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

Part No.	XX	L	T	Barcode
DFMM-SCSC-10M	10	32.8'(10000)	+2"/-0(+50/-0)	
DFMM-SCSC-5M	5	16.4'(5000)	+2"/-0(+50/-0)	
DFMM-SCSC-3M	3	9.84'(3000)	+2"/-0(+50/-0)	
DFMM-SCSC-2M	2	6.56'(2000)	+2"/-0(+50/-0)	
DFMM-SCSC-1M	1	3.28'(1000)	+2"/-0(+50/-0)	

B&B Electronics Manufacturing Co.

	UNIT: Inches[mm]	TITLE: xxM DUPLEX 62.5/125 MULTIMODE SC/SC RISER JUMPER CABLE WITH CLIPS		
	DRAWN BY Ruby	DATE 10/14/2008		
CHECKED BY	DATE	DRAWING NO. C.D. 2380	REV. A	
APPROVED BY	DATE	REF:		
P.O. NO.:	DATE	PART NO. DFMM-SCSC-XX		