


REV.	REVISION	DATE

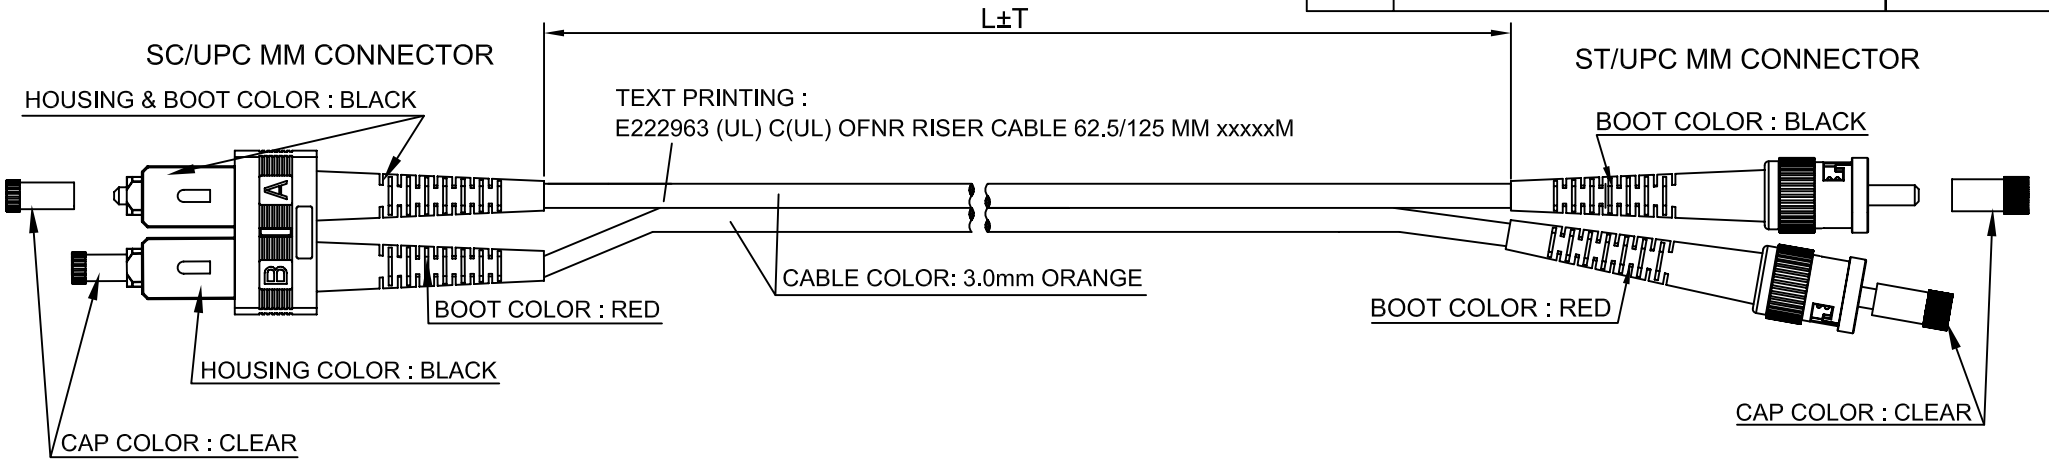

**DFMM-STSC-XX**  
 xxM ST/SC MM 62.5/125, DUPLEX RISER  
 QTY. 1  
[www.bb-elec.com](http://www.bb-elec.com)


DETAIL A

- NOTES:
1. INSERTION LOSS < 0.5dB.
  2. OPERATION TEMP: -20°C TO +60°C
  3. ORANGE PVC OUTER JACKET
  4. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

Part No.	XX	L	T	Barcode
DFMM-STSC-10M	10	32.8'(10000)	+2"/-0(+50/-0)	
DFMM-STSC-5M	5	16.4'(5000)	+2"/-0(+50/-0)	
DFMM-STSC-3M	3	9.84'(3000)	+2"/-0(+50/-0)	
DFMM-STSC-2M	2	6.56'(2000)	+2"/-0(+50/-0)	
DFMM-STSC-1M	1	3.28'(1000)	+2"/-0(+50/-0)	

**B&B Electronics Manufacturing Co.**

 DRAWN BY <b>A. MEDINA</b>	UNIT: <b>Inches[mm]</b>	TITLE: <b>xxM DUPLEX 62.5/125 MULTIMODE          SC/ST RISER JUMPER CABLE WITH CLIP</b>	
	DATE <b>09/18/2008</b>	DRAWING NO. <b>C.D. 2382</b>	REV. <b>A</b>
CHECKED BY	DATE	REF:	
APPROVED BY	DATE	PART NO. <b>DFMM-STSC-XX</b>	
P.O. NO.:	DATE	PART NO.	