


## RS-232 Tester CE Model 9PMTT


The RS-232 Tester is designed to be connected in series with any RS-232 interface. It is used to test the interface for failures and to help identify the equipment that has failed. The Tester may be left in the line permanently. The seven LED's indicate the status of the following lines:

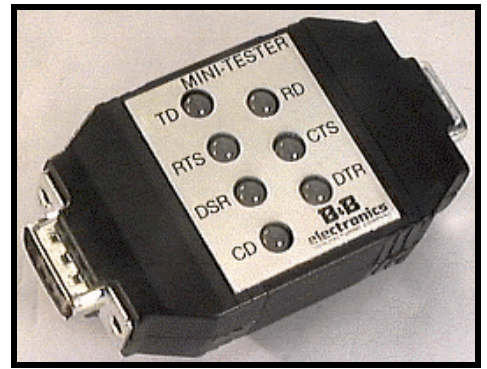

Pin No.:	Signal:	Description:
3.....	TD.....	Transmit Data
2.....	RD.....	Receive Data
7.....	RTS.....	Request To Send
8.....	CTS.....	Clear To Send
6.....	DSR.....	Data Set Ready
1.....	CD.....	Carrier Detect
4.....	DTR.....	Data Terminal Ready

### Two Color Testers (Clear LED's):

Negative Voltage = Mark = LED Red  
 Positive Voltage = Space = LED Green

DECLARATION OF CONFORMITY	
Manufacturer's Name:	B&B Electronics Manufacturing Company
Manufacturer's Address:	P.O. Box 1040 707 Dayton Road Ottawa, IL 61350 USA
Model Numbers:	9PMTT
Description:	RS-232 Tester
Type:	Light industrial ITE equipment
Application of Council Directive:	89/336/EEC
Standards:	EN 50082-1 (IEC 801-2, IEC 801-3, IEC 801-4) EN 50081-1 (EN 55022, IEC 1000-4-2) EN 61000 (-4-2, -4-3, -4-4, -4-6, -4-8) ENV 50204
 Michael J. Fahrion, Director of Engineering	
	

© 1996 B&B Electronics – Revised January 2000

This product designed and manufactured in USA of domestic and imported parts by

### **B & B Electronics Mfg. Co.**

707 Dayton Road - P.O. Box 1040 - Ottawa, IL 61350 USA  
 Phone: (815) 433-5100 - Fax: (815) 433-5105  
 Home Page: [www.bb-elec.com](http://www.bb-elec.com)  
 Sales e-mail: [sales@bb-elec.com](mailto:sales@bb-elec.com) - Fax: (815) 433-5109  
 Technical Support e-mail: [support@bb-elec.com](mailto:support@bb-elec.com) - Fax: (815) 433-5104

### **B & B Electronics Ltd**

Westlink Commercial Park - Oranmore, Co. Galway - Ireland  
 Phone: +353 91 792444 - Fax: +353 91 792445  
 Home Page: [www.bb-europe.com](http://www.bb-europe.com)  
 Sales e-mail: [sales@bb-europe.com](mailto:sales@bb-europe.com)  
 Technical Support e-mail: [support@bb-europe.com](mailto:support@bb-europe.com)